




HOSE JOINERS

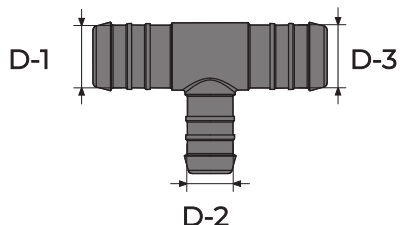


Search by the **PART DIMENSIONS**

Item code	D1 ø mm	D2 ø mm	D3 ø mm	Page	Item code	D1 ø mm	D2 ø mm	D3 ø mm	Page
86E	3	3	3	124	702C	14	6	14	127
86C	4	4	4	124	702B	14	8	14	127
86D	4	6	6	124	702A	14	10	14	127
718C	4	8	8	124	200A	14	12	14	127
86B	5	5	5	124	84A	14	14	14	128
86F	6	4	6	124	701A	14	16	14	128
86A	6	6	6	125	208E	16	8	16	128
705C	6	8	8	125	700C	16	10	16	128
705B	6	10	10	125	700B	16	12	16	128
704D	6	12	12	125	700A	16	14	16	128
718B	8	4	8	125	89E	16	16	16	128
200D	8	6	8	125	208D	18	8	16	129
84D	8	8	8	125	208C	18	10	16	129
705A	8	10	8	125	208B	18	14	16	129
704C	8	12	8	125	89D	18	15	16	129
701D	8	16	8	125	89C	18	18	16	129
718A	10	4	10	126	208A	20	8	20	129
704B	10	6	10	126	207D	20	12	20	129
200C	10	8	10	126	89B	20	15	20	130
84C	10	10	10	126	89A	20	20	20	130
704A	10	12	10	126	207B	20	25	20	130
703B	10	14	10	126	207C	22	16	22	130
701C	10	16	10	126	203E	22	18	22	130
703D	12	6	12	126	203D	22	20	22	130
703C	12	8	12	126	203C	22	22	22	131
200B	12	10	12	127	207A	25	20	25	131
84B	12	12	12	127	203B	25	22	25	131
703A	12	14	12	127	203A	25	25	25	131
701B	12	16	12	127	722A	32	32	32	131



High quality hose joiners made from glass fibre reinforced Polyamide 6. Safe for prolonged use between -40° and +140°C. The connectors are resistant to a range of chemicals including hydrocarbon and mineral oils, fuel and cooling system fluids as well as weak acids and alkalis.




Search by the **PART DIMENSIONS**

Item code	D1 ø mm	D3 ø mm	Page	Item code	D1 ø mm	D3 ø mm	Page
85E	3	3	121	716C	16	8	122
85D	4	4	121	209F	16	10	122
87C	5	4	121	716B	16	12	122
85C	5	5	121	209E	16	14	122
87B	6	4	121	82C	16	16	122
87A	6	5	121	716A	18	10	122
85B	6	6	121	206D	18	16	122
105E	8	4	121	82B	18	18	122
105D	8	6	121	209C	20	14	123
85A	8	8	121	206C	20	16	123
724A	9	9	121	206B	20	18	123
105C	10	6	121	82A	20	20	123
715C	10	6	121	209B	22	16	123
715B	10	8	121	206A	22	18	123
83C	10	10	121	205E	22	20	123
715A	12	6	121	205D	22	22	123
105B	12	8	121	209A	25	18	123
714D	12	10	121	205C	25	20	123
83B	12	12	121	205B	25	22	123
714C	14	6	122	205A	25	25	123
714B	14	8	122	717C	32	28	124
105A	14	10	122	717B	32	28	124
714A	14	12	122	717A	32	25	124
83A	14	14	122				
209D	14	18	122				



High quality hose joiners made from glass fibre reinforced Polyamide 6. Safe for prolonged use between -40° and +140°C. The connectors are resistant to a range of chemicals including hydrocarbon and mineral oils, fuel and cooling system fluids as well as weak acids and alkalis.

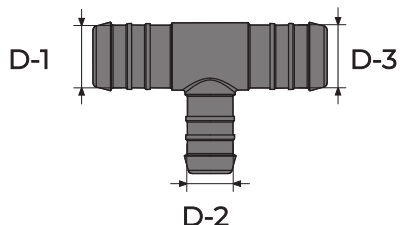



Search by the **PART DIMENSIONS**

Item code	D1 ø mm	D2 ø mm	D3 ø mm	Page	Item code	D1 ø mm	D2 ø mm	D3 ø mm	Page
86E	3	3	3	124	702C	14	6	14	127
86C	4	4	4	124	702B	14	8	14	127
86D	4	6	6	124	702A	14	10	14	127
718C	4	8	8	124	200A	14	12	14	127
86B	5	5	5	124	84A	14	14	14	128
86F	6	4	6	124	701A	14	16	14	128
86A	6	6	6	125	208E	16	8	16	128
705C	6	8	8	125	700C	16	10	16	128
705B	6	10	10	125	700B	16	12	16	128
704D	6	12	12	125	700A	16	14	16	128
718B	8	4	8	125	89E	16	16	16	128
200D	8	6	8	125	208D	18	8	16	129
84D	8	8	8	125	208C	18	10	16	129
705A	8	10	8	125	208B	18	14	16	129
704C	8	12	8	125	89D	18	15	16	129
701D	8	16	8	125	89C	18	18	16	129
718A	10	4	10	126	208A	20	8	20	129
704B	10	6	10	126	207D	20	12	20	129
200C	10	8	10	126	89B	20	15	20	130
84C	10	10	10	126	89A	20	20	20	130
704A	10	12	10	126	207B	20	25	20	130
703B	10	14	10	126	207C	22	16	22	130
701C	10	16	10	126	203E	22	18	22	130
703D	12	6	12	126	203D	22	20	22	130
703C	12	8	12	126	203C	22	22	22	131
200B	12	10	12	127	207A	25	20	25	131
84B	12	12	12	127	203B	25	22	25	131
703A	12	14	12	127	203A	25	25	25	131
701B	12	16	12	127	722A	32	32	32	131




High quality hose joiners made from glass fibre reinforced Polyamide 6. Safe for prolonged use between -40° and +140°C. The connectors are resistant to a range of chemicals including hydrocarbon and mineral oils, fuel and cooling system fluids as well as weak acids and alkalis.

Search by the **PART DIMENSIONS**



Item code	D2 ø mm	D3 ø mm	Page
104C	4	4	132
104B	5	5	132
104A	6	6	132
202D	8	4	132
202C	8	6	132
103D	8	8	132
723A (140°)	8	8	132
103C	10	6	133
202B	10	8	132
202A	10	10	133
706D	12	6	133
201D	12	8	133
201C	12	10	133
103B	12	12	133
706C	14	6	133
706B	14	8	133
201B	14	10	133
201A	14	12	134
103A	14	14	134
707D	16	8	134
707C	16	10	134
707B	16	12	134
707A	16	14	134
706A	16	16	134
721D	16	22	134
204E	18	16	135
204C	18	18	135
721C	18	22	135
720D	18	25	135
204D	20	16	135
204B	20	18	135
204A	20	20	136
721B	20	22	136
720C	20	25	136
721A	22	22	136
720B	22	25	136
720A	25	25	136
719C	32	25	137
719B	32	28	137
719A	32	32	137


Item code	D1 ø mm	D2 ø mm	D3 ø mm	Page
88E	3	3	3	137
88C	4	4	4	138
88D	4	6	4	138
88B	5	5	5	138
88A	6	6	6	138
709C	6	8	6	138
709B	6	10	6	138
709A	6	12	6	138
708D	8	8	8	139
710C	8	10	8	139
710B	8	12	8	139
710A	8	14	8	139
708C	10	10	10	139
711C	10	12	10	139
711B	10	14	10	140
708B	12	12	12	140
711A	12	14	12	140
708A	14	14	14	140
725A	16	16	16	140

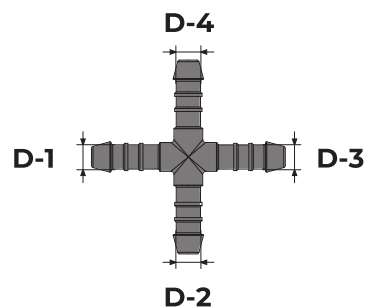

Item code	D1 ø mm	D2 ø mm	D3 ø mm	D4 ø mm	Page
712D	4	4	4	4	140
712C	5	5	5	5	141
712B	6	6	6	6	141
712A	8	8	8	8	141
713D	10	10	10	10	141
713C	12	12	12	12	141
713B	14	14	14	14	141
713A	16	16	16	16	141



High quality hose joiners made from glass fibre reinforced Polyamide 6. Safe for prolonged use between -40° and +140°C. The connectors are resistant to a range of chemicals including hydrocarbon and mineral oils, fuel and cooling system fluids as well as weak acids and alkalis.




Search by the **PART CODE**







	Item code	D1 ø mm	D2 ø mm	D3 ø mm	Page		Item code	D1 ø mm	D2 ø mm	D3 ø mm	Page
	203A	25	25	25	131		209A	25		18	123
	203B	25	22	25	131		209B	22		16	123
	203C	22	22	22	131		209C	20		14	123
	203D	22	20	22	130		209D	18		14	122
	203E	22	18	22	130		209E	16		14	122
						209F	16		10	122	
	204A	20	20		136		700A	16	14	16	128
	204B	20	18		135		700B	16	12	16	128
	204C	18	18		135		700C	16	10	16	128
	204D	20	16		135		701A	14	16	14	128
	204E	18	16		135		701B	12	16	12	127
	205A	25		25	123		701C	10	16	10	126
	205B	25		22	123		701D	8	16	8	125
	205C	25		20	123		702A	14	10	14	127
	205D	22		22	123		702B	14	8	14	127
	205E	22		20	123		702C	14	6	14	127
	206A	22		18	123	703A	12	14	12	127	
	206B	20		18	123	703B	10	14	10	126	
	206C	20		16	123	703C	12	8	12	126	
	206D	18		16	122	703D	12	6	12	126	
						704A	10	12	10	126	
	207A	25	20	25	131	704B	10	6	10	126	
	207B	20	25	20	130	704C	8	12	8	125	
	207C	22	16	22	130	704D	6	12	6	125	
	207D	20	12	20	129	705A	8	10	8	125	
	208A	20	8	20	129	705B	6	10	6	125	
	208B	18	14	18	129	705C	6	8	6	125	
	208C	18	10	18	129						
	208D	18	8	18	129						
	208E	16	8	16	128						

High quality hose joiners made from glass fibre reinforced Polyamide 6. Safe for prolonged use between -40° and +140°C. The connectors are resistant to a range of chemicals including hydrocarbon and mineral oils, fuel and cooling system fluids as well as weak acids and alkalis.






Search by the **PART CODE**





	Item code	D1 ø mm	D2 ø mm	D3 ø mm	D4 ø mm	Page		Item code	D1 ø mm	D2 ø mm	D3 ø mm	Page
	706A		16	16		134		714A	14		12	122
	706B		14	8		133		714B	14		8	122
	706C		14	6		133		714C	14		6	122
	706D		12	6		133		714D	12		10	121
	707A		16	14		134		715A	12		6	121
	707B		16	12		134		715B	10		8	121
	707C		16	10		134		715C	10		6	121
	707D		16	8		134		716A	18		10	121
	708A	14	14	14		140	716B	16		12	122	
	708B	12	12	12		140	716C	16		8	122	
	708C	10	10	10		139	717A	32		32	124	
	708D	8	8	8		139	717B	32		28	124	
	709A	6	12	6		138	717C	32		25	124	
	709B	6	10	6		138		718A	10	4	10	126
	709C	6	8	6		138		718B	8	4	8	125
	710A	8	14	8		139		718C	4	8	4	124
	710B	8	12	8		139			719A		32	32
	710C	8	10	8		139	719B			32	28	137
	711A	12	14	12		140	719C			32	25	137
711B	10	14	10		140	720A			25	25	136	
711C	10	12	10		139	720B			25	22	136	
	712A	8	8	8	8	141	720C		25	20	136	
	712B	6	6	6	6	141	720D		25	18	135	
	712C	5	5	5	5	141	721A		22	22	136	
	712D	4	4	4	4	140	721B		22	20	136	
	713A	16	16	16	16	141	721C		22	18	135	
	713B	14	14	14	14	141	721D		22	16	134	
	713C	12	12	12	12	141						
	713D	10	10	10	10	141						



High quality hose joiners made from glass fibre reinforced Polyamide 6. Safe for prolonged use between -40° and +140°C. The connectors are resistant to a range of chemicals including hydrocarbon and mineral oils, fuel and cooling system fluids as well as weak acids and alkalis.



Search by the **PART CODE**

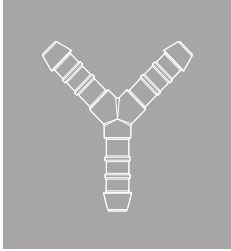	Item code	D1 Ø mm	D2 Ø mm	D3 Ø mm	Page
	722A	32	32	32	131
	723A (140°)	8	8		132
	724A	9		9	121
	725A	16	16	16	140



High quality hose joiners made from glass fibre reinforced Polyamide 6. Safe for prolonged use between -40° and +140°C. The connectors are resistant to a range of chemicals including hydrocarbon and mineral oils, fuel and cooling system fluids as well as weak acids and alkalis.

Hose joiners „I“ pieces

85 E



Ø 3 mm

Ø 3 mm

Ø 3 mm

85 D



Ø 4 mm

Ø 4 mm

Ø 4 mm

87 C



Ø 5 mm

Ø 4 mm

85 C



Ø 5 mm

Ø 5 mm

Ø 5 mm

87B



Ø 6 mm

Ø 4 mm

87A



Ø 6 mm

Ø 5 mm

85B



Ø 6 mm

Ø 6 mm

Ø 6 mm

105E



Ø 8 mm

Ø 4 mm

105D



Ø 8 mm

Ø 6 mm

85A



Ø 8 mm

Ø 8 mm

Ø 8 mm

724A



Ø 9 mm

Ø 9 mm

Ø 9 mm

HOSE JOINERS

105C



Ø 10 mm

Ø 6 mm

715C



Ø 10 mm

Ø 6 mm

715B



Ø 10 mm

Ø 8 mm

83C



Ø 10 mm

Ø 10 mm

Ø 10 mm

715A



Ø 12 mm

Ø 6 mm

105B



Ø 12 mm

Ø 8 mm

714D



Ø 12 mm

Ø 10 mm

83B



Ø 12 mm

Ø 12 mm

Ø 12 mm



Hose joiners are resistant to fuel, oil and glycol. This makes it so that the connectors are suited for use in vehicle heating and cooling systems. They are suited for continuous use between -40C and +140C

HOSE JOINERS

714C



Ø 14 mm

Ø 6 mm

714B



Ø 14 mm

Ø 8 mm

105A



Ø 14 mm

Ø 10 mm

714A



Ø 14 mm

Ø 12 mm

83A



Ø 14 mm

Ø 14 mm

209D



Ø 14 mm

Ø 18 mm

Ø 14 mm

716C



Ø 16 mm

Ø 8 mm

209F



Ø 16 mm

Ø 10 mm

716B



Ø 16 mm

Ø 12 mm

209E



Ø 16 mm

Ø 14 mm

82C



Ø 16 mm

Ø 16 mm

Ø 16 mm

716A



Ø 18 mm

Ø 10 mm

206D



Ø 18 mm

Ø 16 mm

82B



Ø 18 mm

Ø 18 mm



Hose joiners are resistant to fuel, oil and glycol. This makes it so that the connectors are suited for use in vehicle heating and cooling systems. They are suited for continuous use between -40C and +140C

209C



Ø 20 mm

Ø 14 mm

205E



Ø 22 mm

Ø 20 mm

206C



Ø 20 mm

Ø 16 mm

205D



Ø 22 mm

Ø 22 mm

206B



Ø 20 mm

Ø 18 mm

Ø 22 mm

209A



Ø 25 mm

Ø 18 mm

82A



Ø 20 mm

Ø 20 mm

205C



Ø 25 mm

Ø 20 mm

Ø 20 mm

209B



Ø 22 mm

Ø 16 mm

205B



Ø 25 mm

Ø 22 mm

206A



Ø 22 mm

Ø 18 mm

205A



Ø 25 mm

Ø 25 mm

Ø 25 mm



Hose joiners are resistant to fuel, oil and glycol. This makes it so that the connectors are suited for use in vehicle heating and cooling systems. They are suited for continuous use between -40C and +140C

HOSE JOINERS

717C



Ø 32 mm

Ø 25 mm

717B



Ø 32 mm

Ø 28 mm

717A




Ø 32 mm

Ø 32 mm

Ø 32 mm

86C



Ø 4 mm

Ø 4 mm

Ø 4 mm

86D



Ø 4 mm

Ø 4 mm

Ø 6 mm

718C



Ø 4 mm

Ø 4 mm

Ø 8 mm

Ø 4 mm

86B



Ø 5 mm

Ø 5 mm

Ø 5 mm

Ø 5 mm

86E



Ø 3 mm

Ø 3 mm

Ø 3 mm

86F



Ø 6 mm

Ø 6 mm

Ø 4 mm

Hose joiners „T“ pieces



Hose joiners are resistant to fuel, oil and glycol. This makes it so that the connectors are suited for use in vehicle heating and cooling systems. They are suited for continuous use between -40C and +140C

HOSE JOINERS

86A



705C



705B



704D



718B



200D



84D



705A



704C



701D



Hose joiners are resistant to fuel, oil and glycol. This makes it so that the connectors are suited for use in vehicle heating and cooling systems. They are suited for continuous use between -40C and +140C

HOSE JOINERS

718A



Ø 10 mm

Ø 10 mm

Ø 4 mm

704B



Ø 10 mm

Ø 10 mm

Ø 6 mm

200C



Ø 10 mm

Ø 10 mm

Ø 8 mm

84C



Ø 10 mm

Ø 10 mm

Ø 10 mm

704A



Ø 10 mm

Ø 10 mm

Ø 12 mm

703B



Ø 10 mm

Ø 10 mm

Ø 14 mm

701C



Ø 10 mm

Ø 10 mm

Ø 16 mm

Ø 10 mm

703D



Ø 12 mm

Ø 12 mm

Ø 6 mm

703C



Ø 12 mm

Ø 12 mm

Ø 8 mm

Ø 12 mm



Hose joiners are resistant to fuel, oil and glycol. This makes it so that the connectors are suited for use in vehicle heating and cooling systems. They are suited for continuous use between -40C and +140C

200B



702C



84B



702B



703A



702A



701B



200A



Ø 12 mm

Ø 14 mm



Hose joiners are resistant to fuel, oil and glycol. This makes it so that the connectors are suited for use in vehicle heating and cooling systems. They are suited for continuous use between -40C and +140C

HOSE JOINERS

84A



Ø 14 mm

Ø 14 mm

Ø 14 mm

701A



Ø 14 mm

Ø 14 mm

Ø 16 mm

Ø 14 mm

700B



Ø 16 mm

Ø 16 mm

Ø 12 mm

700A



Ø 16 mm

Ø 16 mm

Ø 14 mm

208E



Ø 16 mm

Ø 16 mm

Ø 8 mm

700C



Ø 16 mm

Ø 16 mm

Ø 10 mm

89E



Ø 16 mm

Ø 16 mm

Ø 16 mm

Ø 16 mm



HOSE JOINERS

208D



Ø 18 mm

Ø 18 mm

Ø 8 mm

89C



Ø 18 mm

Ø 18 mm

Ø 18 mm

Ø 18 mm

208C



Ø 18 mm

Ø 18 mm

Ø 10 mm

208B



Ø 18 mm

Ø 18 mm

Ø 14 mm

89D



Ø 18 mm

Ø 18 mm

Ø 15 mm

208A



Ø 20 mm

Ø 20 mm

Ø 8 mm

207D



Ø 20 mm

Ø 20 mm

Ø 12 mm

Ø 20 mm



Hose joiners are resistant to fuel, oil and glycol. This makes it so that the connectors are suited for use in vehicle heating and cooling systems. They are suited for continuous use between -40C and +140C

HOSE JOINERS

89B



Ø 20 mm

Ø 20 mm

Ø 15 mm

207C



Ø 22 mm

Ø 22 mm

Ø 16 mm

89A



Ø 20 mm

Ø 20 mm

Ø 20 mm

203E



Ø 22 mm

Ø 22 mm

Ø 18 mm

207B



Ø 20 mm

Ø 20 mm

Ø 25 mm

203D



Ø 22 mm

Ø 22 mm

Ø 20 mm

Ø 20 mm

Ø 22 mm



203C



Ø 22 mm

Ø 22 mm

Ø 22 mm

Ø 22 mm

203A



Ø 25 mm

Ø 25 mm

Ø 25 mm

Ø 25 mm

207A



Ø 25 mm

Ø 25 mm

Ø 20 mm

203B



Ø 25 mm

Ø 25 mm

Ø 22 mm

722A



Ø 32 mm

Ø 32 mm

Ø 32 mm

Ø 32 mm



Hose joiners are resistant to fuel, oil and glycol. This makes it so that the connectors are suited for use in vehicle heating and cooling systems. They are suited for continuous use between -40C and +140C

HOSE JOINERS

Hose joiners „L“ pieces

104C



Ø 4 mm

Ø 4 mm

Ø 4 mm

104B



Ø 5 mm

Ø 5 mm

Ø 5 mm

104A



Ø 6 mm

Ø 6 mm

Ø 6 mm

202D



Ø 4 mm

Ø 8 mm

202C



Ø 6 mm

Ø 8 mm

103D



Ø 8 mm

Ø 8 mm

723A (140°)



Ø 8 mm

Ø 8 mm

Ø 8 mm

202B



Ø 6 mm

Ø 10 mm

202A



Ø 8 mm

Ø 10 mm Ø 10 mm



HOSE JOINERS

103C



Ø 10 mm

Ø 10 mm

Ø 10 mm

103B



Ø 12 mm

Ø 12 mm

Ø 12 mm

706D



Ø 6 mm

Ø 12 mm

706C



Ø 6 mm

Ø 14 mm

201D



Ø 8 mm

Ø 12 mm

706B



Ø 8 mm

Ø 14 mm

201C



Ø 10 mm

Ø 12 mm

201B



Ø 10 mm

Ø 14 mm

Ø 14 mm



Hose joiners are resistant to fuel, oil and glycol. This makes it so that the connectors are suited for use in vehicle heating and cooling systems. They are suited for continuous use between -40C and +140C

HOSE JOINERS

201A



Ø 12 mm

Ø 14 mm

707B



Ø 12 mm

Ø 16 mm

103A



Ø 14 mm

Ø 14 mm

707A



Ø 14 mm

Ø 16 mm

Ø 14 mm

706A



Ø 16 mm

Ø 16 mm

707D



Ø 8 mm

Ø 16 mm

721D



Ø 22 mm

Ø 16 mm

Ø 16 mm



Hose joiners are resistant to fuel, oil and glycol. This makes it so that the connectors are suited for use in vehicle heating and cooling systems. They are suited for continuous use between -40C and +140C

204E



Ø 16 mm

Ø 18 mm

720D



Ø 25 mm

Ø 18 mm

Ø 18 mm

204C



Ø 18 mm

Ø 18 mm

204D



Ø 16 mm

Ø 20 mm

721C



Ø 22 mm

Ø 18 mm

204B



Ø 18 mm

Ø 20 mm

Ø 20 mm



Hose joiners are resistant to fuel, oil and glycol. This makes it so that the connectors are suited for use in vehicle heating and cooling systems. They are suited for continuous use between -40C and +140C

HOSE JOINERS

204A



Ø 20 mm

Ø 20 mm

721A



Ø 22 mm

Ø 22 mm

721B



Ø 22 mm

Ø 20 mm

720B



Ø 25 mm

Ø 22 mm

Ø 22 mm

720C



Ø 25 mm

Ø 20 mm

Ø 20 mm

720A



Ø 25 mm

Ø 25 mm

Ø 25 mm



719C



Ø 25 mm

Ø 32 mm

Ø 25 mm

719A



Ø 32 mm

Ø 32mm

Ø 32 mm

719B



Ø 28 mm

Ø 32 mm

Ø 28 mm

Hose joiners „Y“ pieces

88E



Ø 3 mm

Ø 3 mm

Ø 3 mm

Ø 3 mm



Hose joiners are resistant to fuel, oil and glycol. This makes it so that the connectors are suited for use in vehicle heating and cooling systems. They are suited for continuous use between -40C and +140C

HOSE JOINERS

88C



88D



709C



709B



709A



88B



88A



Ø 6 mm



HOSE JOINERS



Hose joiners are resistant to fuel, oil and glycol. This makes it so that the connectors are suited for use in vehicle heating and cooling systems. They are suited for continuous use between -40C and +140C

HOSE JOINERS

Ø 10 mm

Ø 10 mm

711B



Ø 14 mm

Ø 10 mm

Ø 14 mm

Ø 14 mm

708A



Ø 14 mm

Ø 14 mm

Ø 12 mm

Ø 12 mm

708B



Ø 12 mm

Ø 16 mm

Ø 16 mm

725A



Ø 16 mm

Ø 16 mm

Ø 12 mm

Ø 12 mm

711A



Ø 14 mm

Ø 12 mm

Hose joiners „X“ pieces

Ø 4 mm

712D



Ø 4 mm

Ø 4 mm

Ø 4 mm

Ø 4 mm



712C



Ø 5 mm

712B



Ø 6 mm

712A



Ø 8 mm

713D



Ø 10 mm

713C



Ø 6 mm

713B



Ø 6 mm

713A



Ø 16 mm



Hose joiners are resistant to fuel, oil and glycol. This makes it so that the connectors are suited for use in vehicle heating and cooling systems. They are suited for continuous use between -40C and +140C